




Zoned Surge Protection Products

Proven to cut downtime and replacement part costs


PRODUCT SERIES: ZONEBARRIER: “The effective barrier between surges and sensitive I/Oports.”
ATS ORDER #: AT24525
APPLICATION: Protects dial-up telephone lines from transients caused by direct or indirect lightning.
TECHNOLOGY: Solid state sidactors are combined with fast acting fuses and resistors to form three distinct stages of protection.
INSTALLATION: This ZoneBarrier can be mounted on a standard 35mm DIN rail, or to any flat surface for standalone applications.
APPROVAL: UL497A listed, tested to IEC801-5, CCITT K17

UL 497A Listed

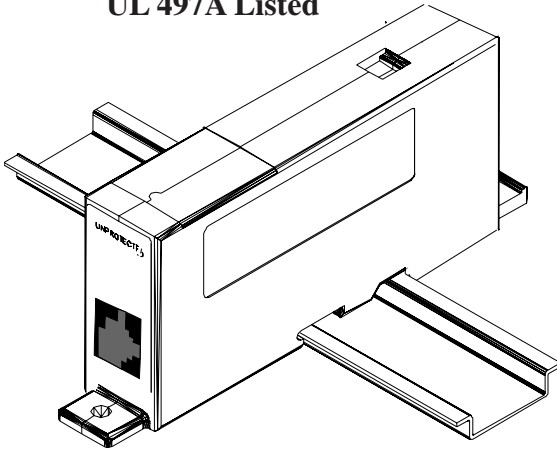

SPECIFICATIONS

Circuit Type: 3 Stage Series Hybrid
Lines Protected: 4
Connectors: Modular jack
Surge Capacity: 3.0kA 8/20 impulse per line
Clamp Voltage: 270V @ 1kA 8/20
Rated Voltage: 200Vdc
Max. Frequency: 50MHz
Max. Inline Resistance: 9Ω
Case Dimensions: 5.1” x 2.3” x 1.0” overall

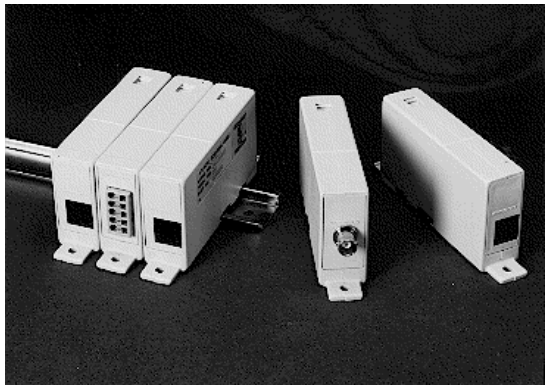

ZoneBarrier Series Communication/Data Line Protection

Over 40 models covering all applications.
Mix and match any combination of Telco, Data and LAN protection
UL497A, UL497B, UL certified Cat 5.
Mounts on a rail for multipoint protection.
Fixes individually to any flat surface, for single port protection.